



Technical Data

REMOTE WARNING DEVICE




PART NUMBER - 3008039

Please read carefully before commencing installation

Anglo Nordic Burner Products Ltd
12/14 Island Farm Avenue, West Molesey
Surrey, England, KT8 2UZ
Tel: +44 (0) 20 89790988 Fax: +44 (0) 20 89796961
Email: sales@anglonordic.co.uk

ENVIRONMENTAL INFORMATION

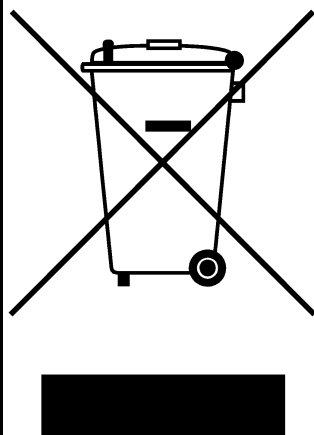

European Directives 2002/96/EC and 2003/108/EC require that the equipment bearing this symbol on the product an/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product must be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities.

IMPORTANT WARNING NOTES

Failure to comply with any of the following will invalidate the alarm warranty.

1. This equipment must not be sited adjacent to a petrol dispenser or in any other hazardous zone.
2. Installation of this equipment should only be carried out by qualified installation engineers. The installation must conform to all relevant electrical and local authority regulations and standards.

PRODUCT DESCRIPTION

The Remote warning device is designed to provide an audible and visible alarm in the event of an alarm's external passive output being activated.

INSTALLATION INSTRUCTIONS

1. Open the Remote Warning Device box cover.
2. Screw the alarm box to a suitable wall or vertical surface using the four mounting holes.
3. Connect a constant 230V AC supply, rated at 13 amps, via one of the cable glands supplied, to the terminals in the alarm box labelled '230V AC supply in' as follows:

L - Live

N - Neutral

4. Connect an alarm's external passive output, (rated at a minimum of 12V DC / 5 amps), via one of the cable glands supplied to the terminals labelled 'TO EXT. ALARM CONTACTS'. The pair of sensor wires can be connected either way round.
5. Replace the alarm box cover, tighten all terminal screws and cable glands.

OPERATING INSTRUCTIONS

1. When the remote sensor switch is activated the siren will sound and the beacon will flash.
2. Press the "SILENCE" button to cancel the siren. The beacon will continue to flash until the remote sensor switch is deactivated. If the "SILENCE" button is not pressed the siren will continue to sound and the beacon will continue to flash until the sensor switch is deactivated.
3. Press and hold the "TEST" button to temporarily activate the siren and beacon.



Anglo Nordic Burner Products Ltd
12/14 Island Farm Avenue, West Molesey
Surrey, England, KT8 2UZ
Tel: +44 (0) 20 89790988 Fax: +44 (0) 20 89796961
Email: sales@anglonordic.co.uk