
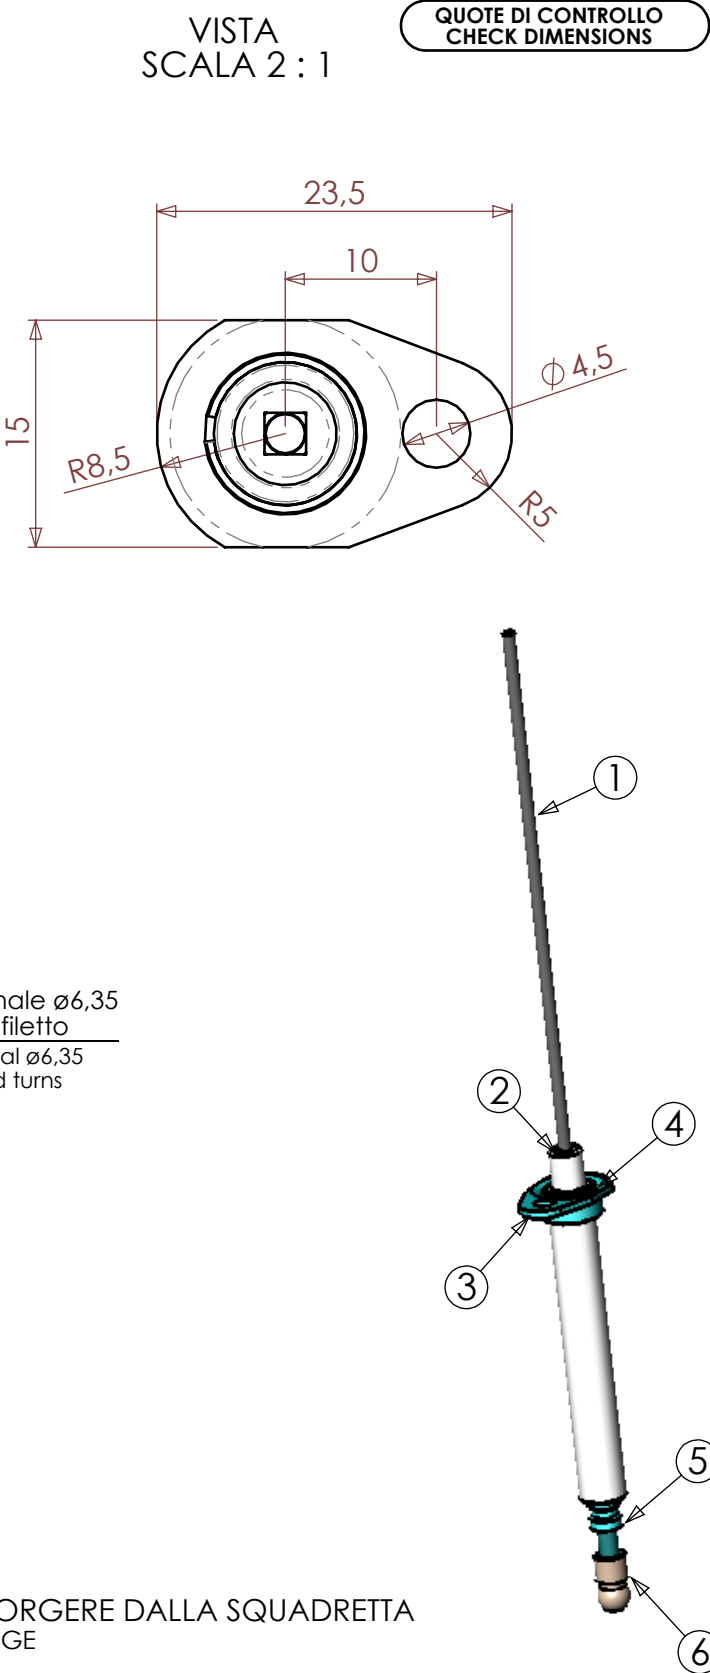


[illegible]

Pos	Nr.	Codice	Descrizione	Dis	Mat.
1	1	31923660	Wire ø2,6	16246	Kanthal D
2	1	0275704	Insulator	6765	Al2O3 92%-Glazed
3	1	23511619	Bracket	9247	Zinc-plated steel
4	1	2355951	Retaining ring	1672	Steel
5	1	23511633	Connection M4	8894	Zinc-plated steel
6	1	2350152	Connection ø6,35	2706	Nickel-plated steel

RoHS Conforme / RoHS Compliance

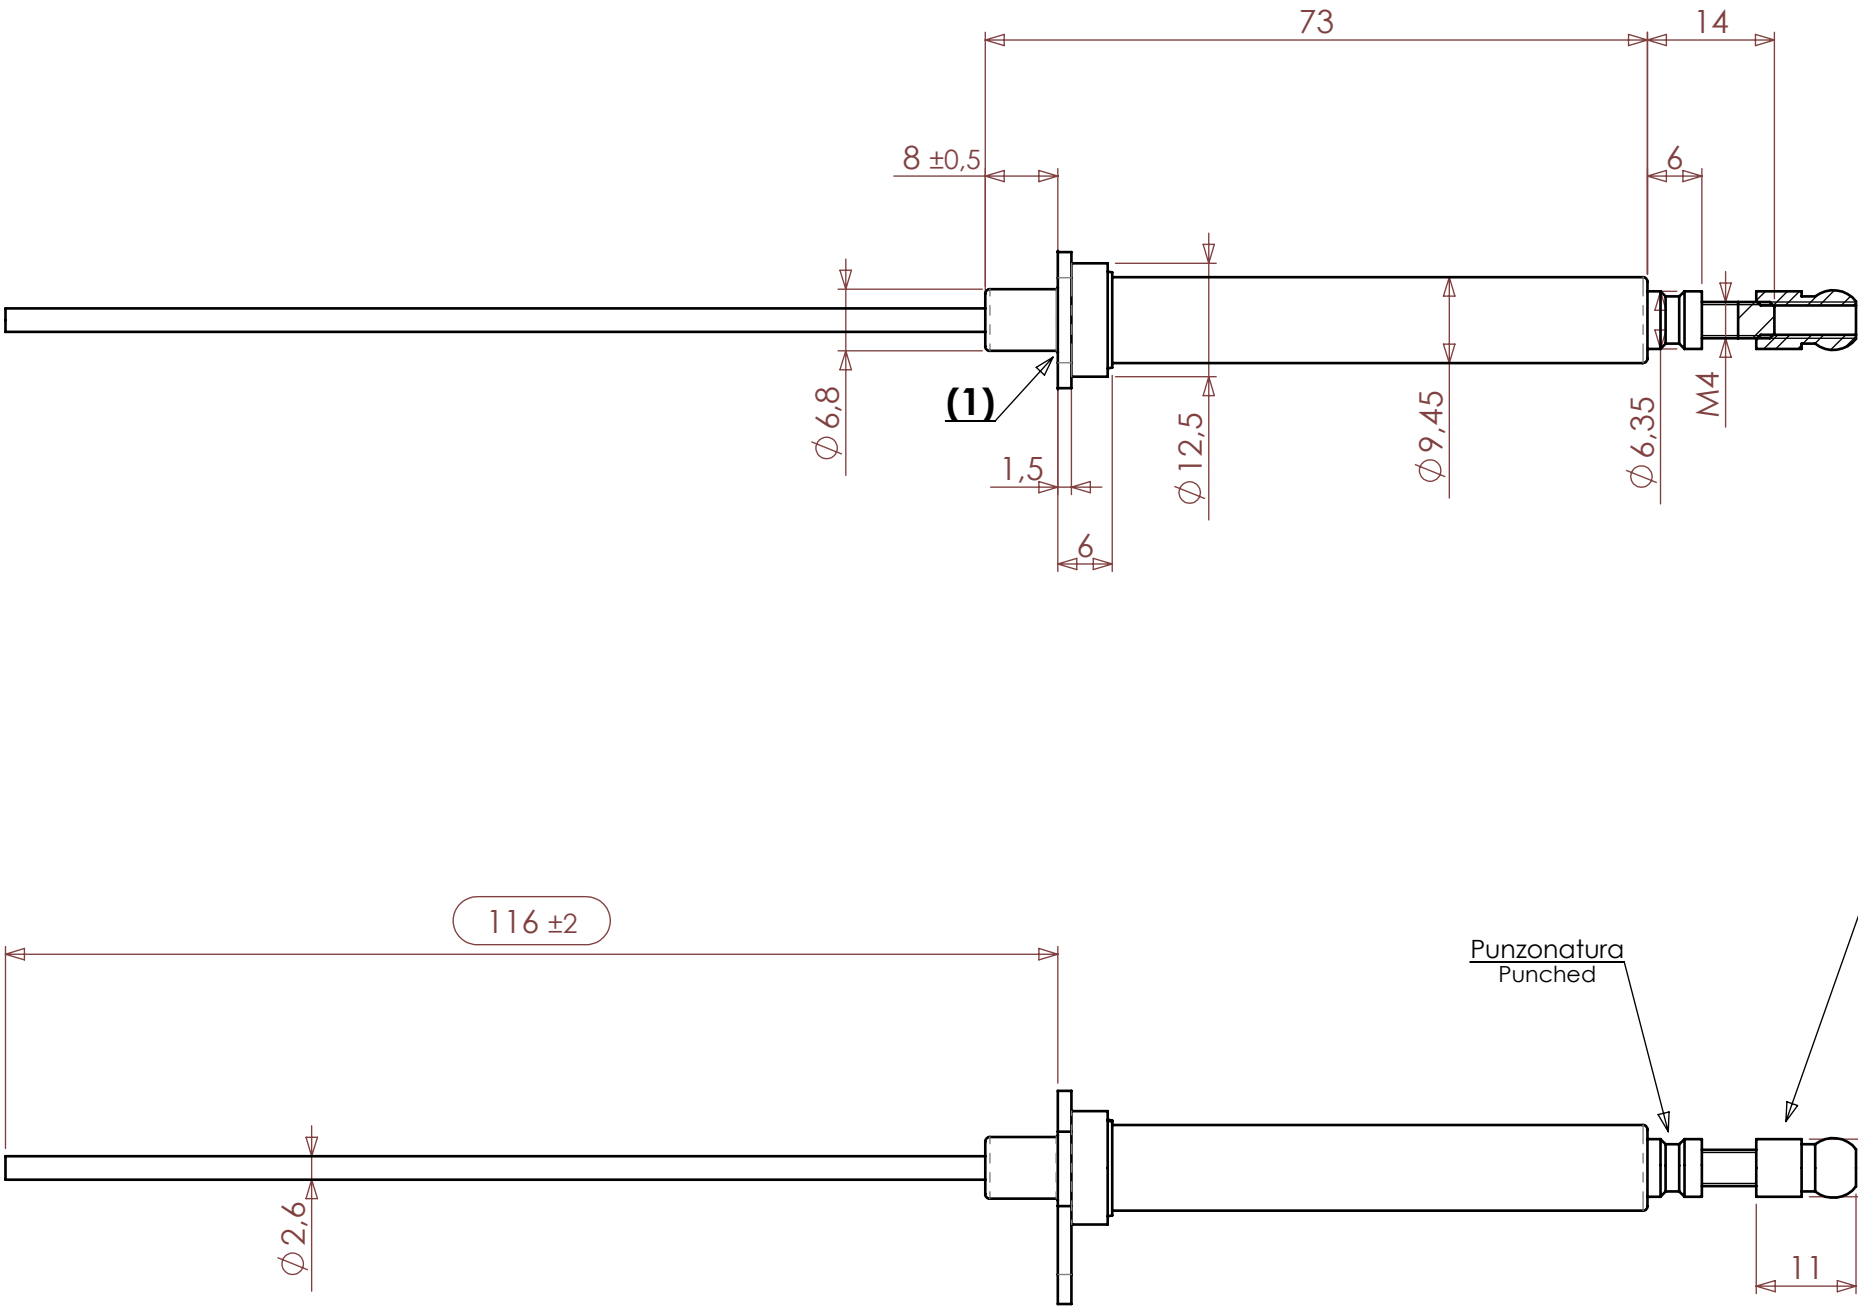

(1): IL COLLARE ELASTICO NON DEVE SPORGERE DALLA SQUADRETTA
(1): RETAINING RING MUST NOT EXCEED TO FLANGE

LE TOLLERANZE DELL'ISOLATORE NON INDICATE SONO SECONDO DIN 40680/83 m
INSULATOR TOLERANCE UNLESS OTHERWISE SPECIFIED DIN 40680/83 m

DESCRIZIONE / DESCRIPTION		MATERIALE / MATERIAL: VEDI NOTE/SEE NOTE		
Candela a/sm. c/squad. KD ø2,6		FINITURA / FINISHING: VEDI NOTE/SEE NOTE		
		DISEGNATO / DRAWN: GANDOLFI		
FILE 3D: 3779	CODICE CLIENTE CUSTOMER CODE	CONTROLLATO / CHECKED:		
FILE 2D: 0775203	9600023			
CASTFUTURA Via Baccanello. 1/b 24030 Terno d'Isola -BG- Italy Tel.++39 035 4949411 Fax ++39 035 4949419 E-mail: info@castfutura.com http://www.castfutura.com		TOLL. LUNGH / LENGTH TOL.: UNI EN 22768/96 - v		
		TOLL. ANGOLI / ANGLES TOL. : ±3°		
		SCALA/SCALE: 1.2:1	DATA/DATE: 21/07/1993	SOST. IL/REPL.DRW:
		SUPPLIER CODE:	CODICE PRODOTTO / PRODUCT CODE	
		DISEGNO / DRAWING 3779	0775203	REV. 00E
RIPRODUZIONE VIETATA SENZA AUTORIZZAZIONE CASTFUTURA Reproduction prohibited without authorization CASTFUTURA			A3	