

FILTRI GASOLIO con vaschetta alluminio DIESEL FILTERS with aluminium bowl



Cod./Cod.	Descrizione/Description	Dim.	P.Max
OF008AL	20204/AL Filtro Cartuccia inox 100μ 20204/AL Filter Stainless steel cartridge 100μ	1/4"	2bar
OF010AL	20201/AL Filtro Cartuccia inox 100μ 20201/AL Filter Stainless steel cartridge 100μ	3/8"	2bar
OF015AL	20202/AL Filtro Cartuccia inox 100μ 20202/AL Filter Stainless steel cartridge 100μ	1/2"	2bar
OF010AL-44	20201AL4 Filtro Cartuccia inox 44μ 20201AL4 Filter Stainless steel cartridge 44μ	3/8"	2bar
OF015AL-44	20202AL4 Filtro Cartuccia inox 44μ 20202AL4 Filter Inox cartridge 44μ	1/2"	2bar
OF008AL-15	20204CAL Filtro Cartuccia carta 15μ 20204CAL Filter Paper cartridge 15μ	1/4"	2bar
OF010AL-15	20201CAL Filtro Cartuccia carta 15μ 20201CAL Filter Paper cartridge 15μ	3/8"	2bar
OF015AL-15	20202CAL Filtro Cartuccia carta 15μ 20202CAL Filter Paper cartridge 15μ	1/2"	2bar

Caratteristiche tecniche/Technical features	
Pmax - Inlet max	2bar
Filtri - Filters	100μ - 44μ - 15μ
Attacchi Inlet-Outlet Connection	1/4" - 3/8" - 1/2" ISO 228
Temperatura di esercizio Working temperature	-20° C - +60° C
Utilizzo - Use	Gasolio - Diesel

Materiali/Materials:

Corpo - Body	Die - Cast Aluminium Gd - AISI12Cu - EN AB 46100
Cartuccia Cartridge	Alluminio o carta Stainless steel mesh or paper


RICAMBI / SPARE PARTS

Cartucce filtranti / Filter cartridge


Cod./Cod.	Mod./Mod.	Descrizione/Description
OFC100-3	20201/C1	100μ - Inox grecata (Corrugated stainless steel) cm² 105
OFC044-3	20201/C4	44μ - Inox grecata (Corrugated stainless steel) cm² 105
OFC015-3	20101CC5	15μ - Carta ondulata (Corrugated paper) cm² 235

Kit guarnizioni / Gasket kit

Cod./Cod.	Mod./Mod.	Descrizione/Description
OFG-3	-	Kit guarnizioni per serie / Gasket kit for serie 20200

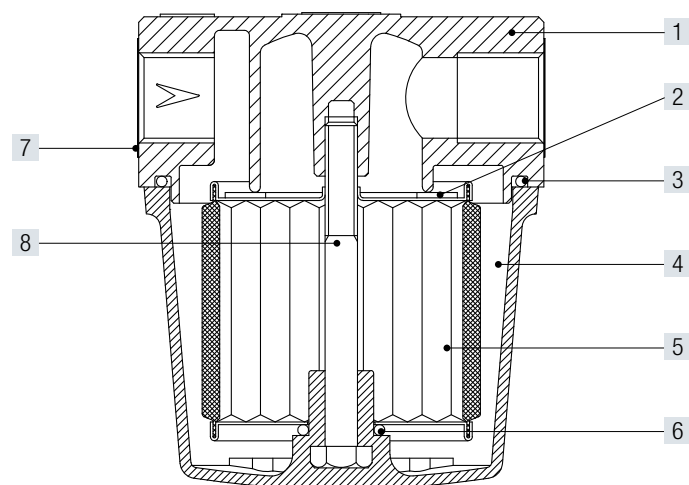

1	Coperchio - Cover
2	Guarnizione - Gasket
3	O-Ring - O-Ring
4	Vaschetta - Bowl
5	Cartuccia - Cartridge
6	O-Ring - O-Ring
7	Etichetta - Label
8	Vite - Screw

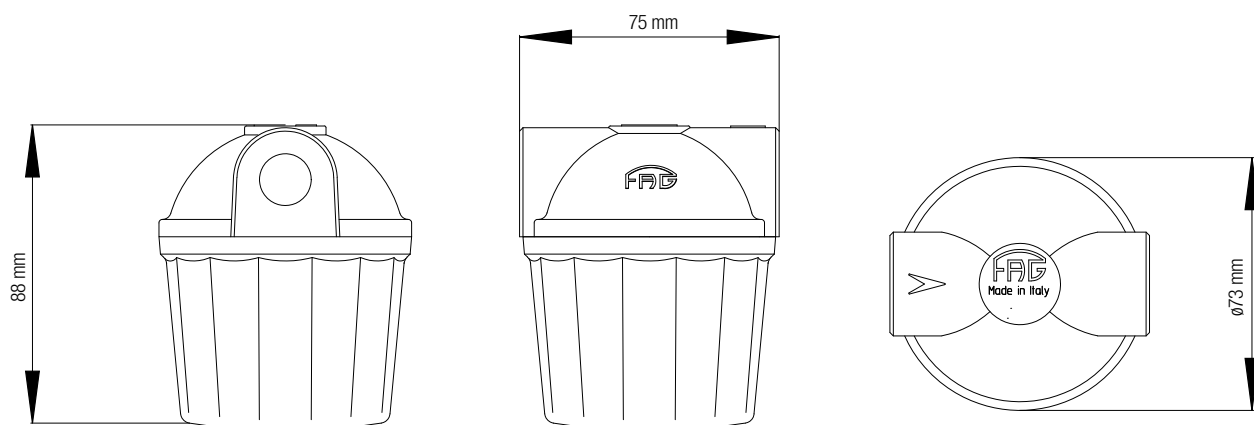

Dimensioni / Dimension	1/4"	3/8"	1/2"
PESO / WEIGHT (g)	260	250	240