


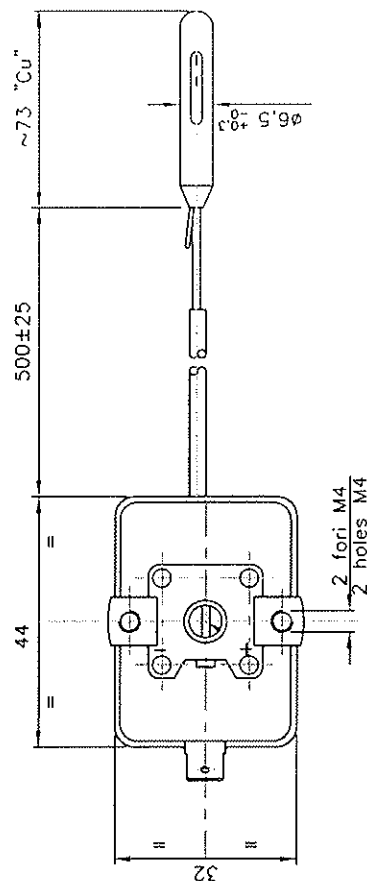

A diagram showing a Z-shaped polymer chain with three vertices marked by open circles. An arrow labeled C^+ points to the central vertex of the Z-shape.

Campo di taratura Calibration range	(C1 CHIUSO) (C1 CLOSED)	5 °C
Tolleranza Tolerance		±3°C
Differenziale Differential		3±1 °C
Elemento sensibile a dilatazione di liquido Liquid filled sensing element		
Temperatura max. di sopportazione dell'elemento sensibile Sensing element max. temperature resistance		60 °C
Costante di tempo secondo DIN 3440 Time constant according to DIN 3440		
Protezione cassa Case protection		IP00
Capillare ricoperto in PVC R3 rosso Capillary protection with red PVC R3		
Portata nominale dei contatti Contacts rating	16 (4)A 250V ~ 6 (1)A 400V ~	
Termostato incorporato non elettronico Non electronical incorporated thermostat		
Metodo di montaggio: fissaggio a vite Mounting: screw fixing		
Utilizzatore conduttori resistenti al calore almeno To apply heat resistant conductors of minimum		T 130
Messa a terra del dispositivo: Device earthing:	morsetti faston faston clamp	
Tipo di azione/Type of action		1B
Situazione di inquinazione/Pollution situation		NORMALE/Normal
Omologhe Approvals	ENEC 03 - CE 0497 (PED) - DIN - CSA	

[illegible]

This growing is property of the TAO and shall not be reproduced in any manner, not used for any purpose other than for which it was specifically furnished. All other rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without permission in writing from the TAO.