


MODEL HZ 3 OIL METER


for central oil delivery
oil-burning furnaces

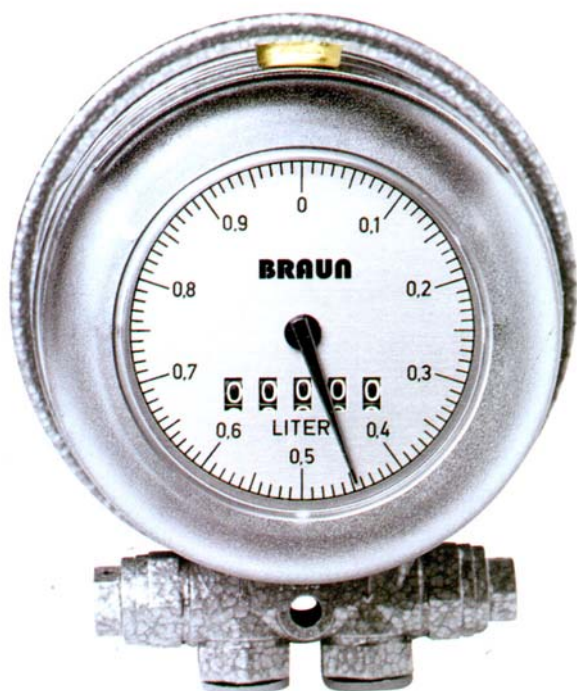

Model HZ 3 Specifications

measuring accuracy	+/- 1 %
calibrated flow range	0.18 to 12 l/h
maximum flow rate	30 l/h = 25 kg/h
furnace output	1.65 kw to 275 kw
display range	0,1 to 99999 l
nominal pressure	6 bar
pressure loss	0.05 to 0.1 bar
fuel oil	EL as per DIN 51603
operating temperature	max. 60 °C
threaded connection type	G 1/4", internal threading
weight in kg	1,25 kg

Anglo Nordic Burner Products Ltd.
12-14 Island Farm Avenue
West Molesey
Surrey KT8 2UZ England
Tel +44(0)20 8979 0988
Fax +44(0)20 8979 6961
Web Site: www.anglonordic.co.uk
e-mail: sales@anglonordic.co.uk
e-mail: paulbarber@anglonordic.co.uk

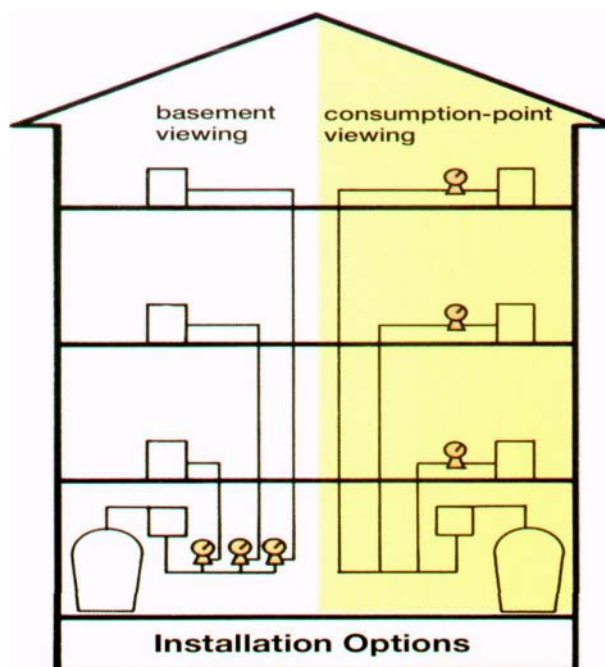

Your benefits:

- Capable of handling both EL fuel oil and diesel fuel.
- Able to measure the smallest of quantities with an unparalleled degree of precision.
- Easy-to-read oil consumption display. A single rotation of the sweep hand (1 litre) translates to a one-unit forward movement of the roller-type register. Quick readouts from any angle.
- The calibrated HZ3 (with European qualification approval No. D01/5.223.03) allows for precise measurement of actual heating oil consumption.
- Calibration validity 10 years.
- Works on both pressure-feed and suction-feed systems.
- Rugged. Can take years of abuse.
- The velocity of the moving parts when measuring is minimal - translating to virtually no wear and tear with the magnetic coupling constituting the only moving part.
- Low noise level - elastic insulation.
- 4 possible installation configurations, the HZ3 oil meter has been equipped with one each vertical and a horizontal feed and discharge adapter.
- **Please note** these units should be fitted inside a building or installed in a waterproof/protective housing