


OIL SUCTION PUMP APPLICATIONS

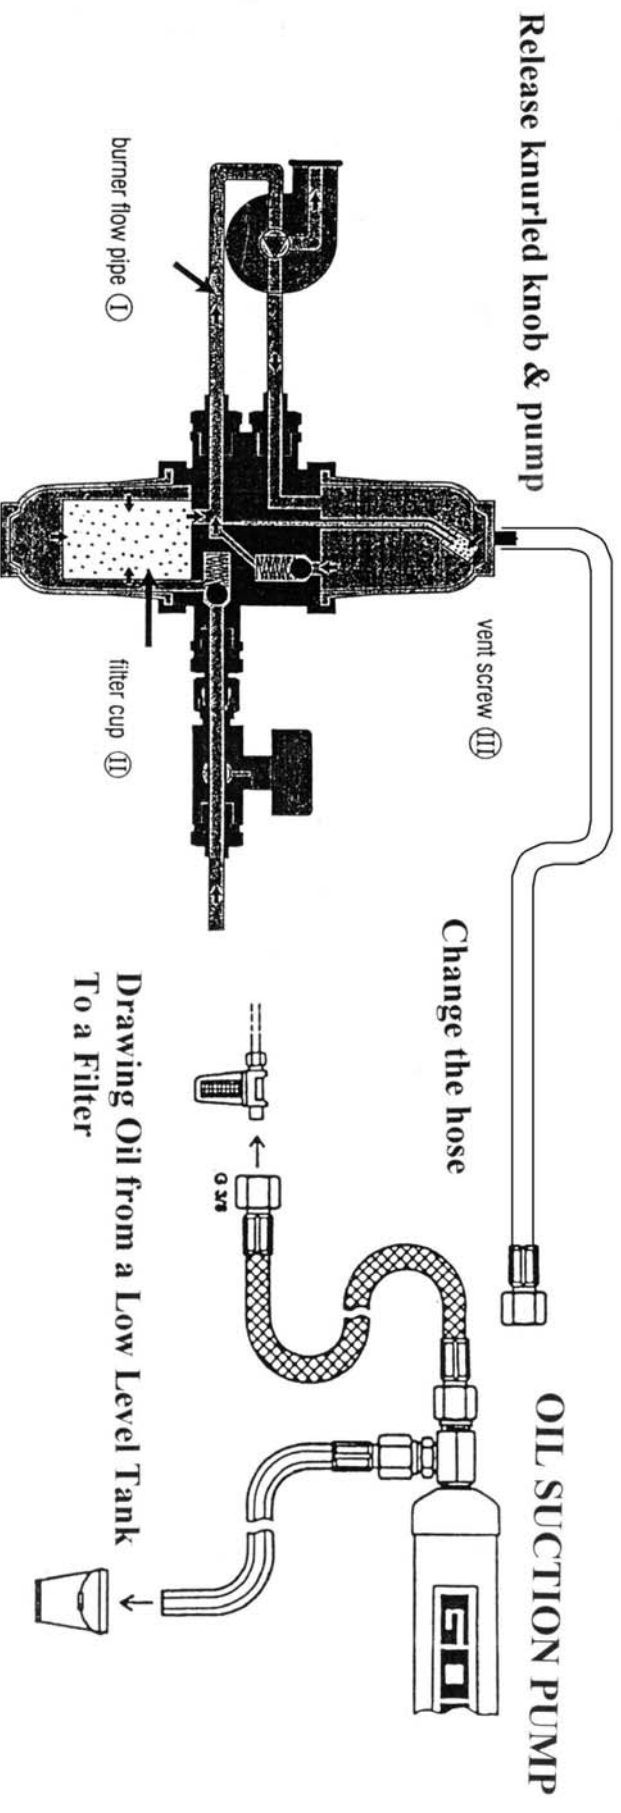

Drawing Oil from a Low Level Tank to a GS2000 Indoor / Outdoor Model De-Aerator

**Anglo Nordic
Burner Products Ltd.,**

Registered Office
12/14 Island Farm Avenue,
West Molesey,
Surrey KT8 2UZ

Tel: +44 (0)20-8979 0988
Fax: +44 (0)20-8979 6961
E-Mail: sales@anglonordic.co.uk
Web Site: www.anglonordic.co.uk

Capacity per stroke (double acting)
400 milli litres

Maximum Suction -0.8 Bar

OIL SUCTION PUMP



The OIL SUCTION PUMP available from Anglo Nordic is an essential tool for all Oil Engineers whether installing new systems or modifying old systems where the systems are not self priming.

As more and more systems are now using Top Entry tanks the use of de-aerators and oil lifters has become more widespread resulting in a greater requirement for OIL SUCTION PUMPS.

The unit is a reciprocating suction pump. Each Pump is supplied with a suction hose for connecting to the GS 2000 De-Aerator (see overleaf) or an oil filter and also with a discharge flexible hose for draining the excess oil into a collecting basin.

General usage instructions are shown overleaf but for more information, prices or details of stockists in your area, please contact our Sales Office.



ANGLO NORDIC BURNER PRODUCTS LTD

12/14 Island Farm Avenue, West Molesey, Surrey KT8 2UZ

Tel: 020 8979 0988

Fax: 020 8979 6961

Web Site www.anglonordic.co.uk E-Mail sales@anglonordic.co.uk