



# **Technical Data**

## **ATEX APPROVED**

## **HIGH LEVEL ALARM**


Applies to the following models **only**:

**- 3008050      - 3008051**

**Please read carefully before commencing installation**

Anglo Nordic Burner Products Ltd  
12/14 Island Farm Avenue, West Molesey  
Surrey, England, KT8 2UZ  
Tel: +44 (0) 20 89790988 Fax: +44 (0) 20 89796961  
Email: [sales@anglonordic.co.uk](mailto:sales@anglonordic.co.uk)

## **ENVIRONMENTAL INFORMATION**



European Directive 2012/19/EU requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product must be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities.

## **PRODUCT DESCRIPTION**

The High Level Alarm is designed to provide visual and audible alarms whenever a predetermined level in a storage tank is reached. The system consists of a weighted float sensor that is connected, with a 5 metre fuel resistant cable, to the weatherproof bund alarm box containing the visual and audible alarms.

This alarm is approved to operate with flammable liquids classed as category 1, 2 or 3 in accordance with European Regulation No. 1272/2008. It is ATEX certified in accordance with EN 60079-0:2012 and EN 60079-11:2012. It is also IECEx certified in accordance with IEC 60079-0:2011 Ed 6 and IEC 60079-11:2011 Ed 6.

The alarm box, featuring the warning devices and test button, must be located outside any hazardous zone and bears the following certification marking and number:

CML16ATEX2356X  
IECEX CML 16.0129X

 II 1 G  
[Ex ia IIA Ga]  
-20°C to +40°C  
 2503

The float sensor(s) can be located in hazardous zones 0, 1 or 2 and bears the following certification marking and number:

CML 16ATEX2355X  
IECEX CML 16.0128X  
CML 16ATEX2356X  
IECEX CML 16.0129X

 II 1 G  
Ex ia IIA T3 Ga  
-20°C to +40°C

## **CONDITIONS OF CERTIFICATION**

1. Due to safety critical internal creepage and clearance distances in the control unit, if installed in a location other than a clean and dry environment, the user shall ensure that the control unit is additionally provided with protection having an ingress protection rating of at least IP54 and is maintained throughout the lifetime of the equipment.
2. The float switch incorporates an isolated metal part which could become either charged in use or be a discharge point for charged liquids upon filling or emptying. The float switch shall only be used in applications where static generated via contact liquids are controlled so not to be considered an ignition source.
3. Only alkaline batteries of the same make shall be used as replacements.


## **IMPORTANT WARNING NOTES**

1. This alarm is designed for use with liquids classed as category 1, 2 or 3 in accordance with European Regulation No. 1272/2008, including petrol, diesel, gas oil, water, hydraulic oil and heating oil.
2. The alarm box featuring the warning devices and test buttons must not be installed in a hazardous zone. The float sensor can be located in zones 0, 1 or 2 with the supplied connecting wire running to the alarm box.
3. The user must ensure that chemicals present in the atmosphere do not affect the performance or degrade the polycarbonate enclosure.
4. Use only the correct ATEX/IECEx certified float switches supplied.
5. The installation must be carried out by qualified installation engineers in accordance with the requirements of EN 60079-14 the latest relevant electrical and local authority regulations and standards.
6. It must not be used with any liquids or applications other than those specified. We will accept no warranty claims or liability if it is used for other liquids or applications.
7. This product must not be used if it is damaged.

## **INSTALLATION**

1. Using the mounting lugs provided, fix the high level alarm box in the position required using the supplied screws.
2. Hang the float switch inside the fuel storage tank and ensure it does not foul inside. For steel tanks (HLA3A.BSP) the brass cap will thread onto a 1 1/2" tank fitting. For plastic tanks (HLA3A.BP) the cable is secured using the P-clip provided.
3. Locate the float switch so it will be activated when the level in the tank reaches the required maximum height and secure in position using the gland on the cap/plate.
4. Remove the alarm box cover (2 screws on the front) and connect the battery connector to the battery.
5. Press green button on top of the alarm box. Ensure a series of short beeps can be heard and the light flashes. Replace cover and screw down firmly.

## **INSTALLATION DIAGRAM**

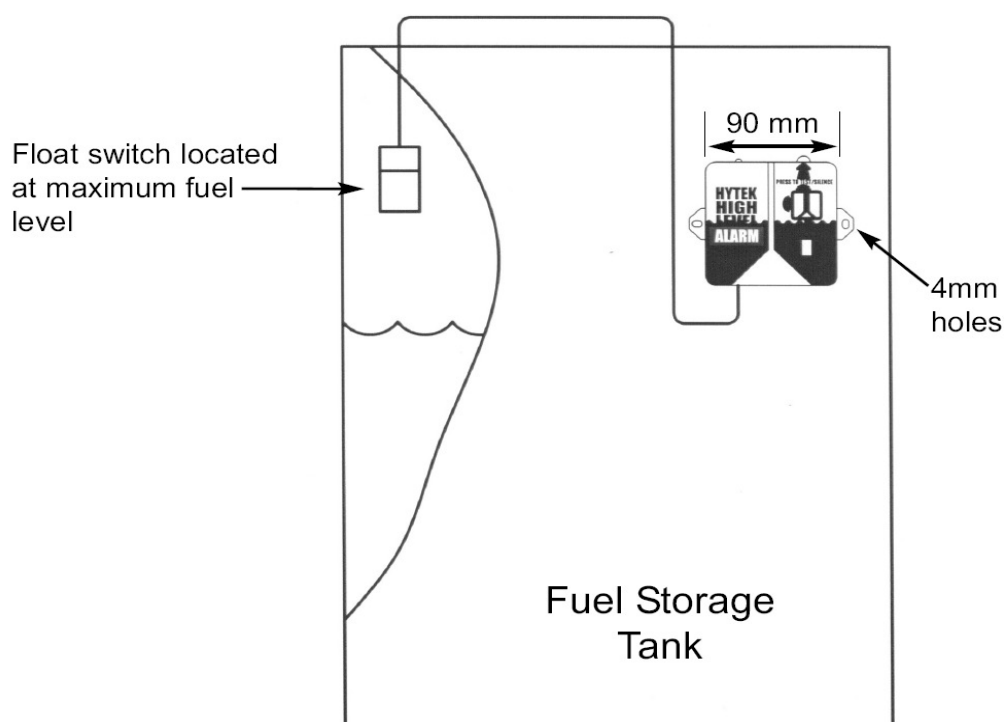

## **OPERATION**

The High Level Alarm will operate when the float switch is activated by a rising liquid level in the fuel storage tank. The alarm will sound as a rising beep every 2.5 seconds and the light will flash simultaneously.

To silence the alarm, press the green button. The light will continue to flash until the liquid level in the tank bund drops below the level of the float switch.

The battery will power the High Level Alarm for 72 hours in full alarm mode with both the sounder and light activated. Low battery power is indicated by a short beep every 25 seconds.

When the battery is low and the alarm is activated the alarm will sound as a rising beep every 5 seconds to conserve power.

The light will flash every 25 seconds in normal operation (not in alarm mode) to indicate that the bund alarm is operating correctly.

If the float switch is disconnected or the cable has been severed the Hytek High Level Alarm will emit a short beep every 5 seconds. The light and sounder can be tested at any time by pressing the green button once. If the High Level Alarm is functioning correctly a short series of beeps will sound and the light will flash.



# **E.U. DECLARATION OF CONFORMITY**

**HYTEK**  
FUEL & LUBRICATION  
EQUIPMENT



Company Name: **Hytek (GB) Ltd**

Address: **Delta House, Green Street. Elsenham,  
Bishops Stortford, Hertfordshire, CM22 6DS, UK**

Date of Issue: **5<sup>th</sup> May 2017**

Equipment Details: **Hytek ATEX Bund and High Level Alarms  
BA3A.BP, BA3A.BS, BA3A.BSP, BA3A.BAB  
HLA3A.BP, HLA3A.BS, HLA3A.BSP, HLA3A.BAB**

Applicable Directives:  
& Standards

**2014/30/EU EMC Directive**  
EN 61326-1:2013  
Electromagnetic compatibility (EMC) – Group 1, Class B Eq. (Emissions)  
EN 61326-1:2013  
Electromagnetic compatibility (EMC) – Industrial Environment (Immunity)

**2014/35/EU Low Voltage Directive**

**2006/42/EC Machinery Directive**

**2012/19/EU Waste Electrical & Electronic Equipment Regulations**

**2011/65/EU Restriction of Hazardous Substances Directive (RoHS2)**

**2014/34/EU ATEX Directive**  
ATEX - EN 60079-0:2012 + A11:2013 and EN 60079-11:2012  
IECEX - IEC 60079-0:2011 Ed 6 and IEC 60079-11:2011 Ed 6

EC Type examination Certificate No.: CML 16ATEX2356X  
IECEX CML 16.0129X

Marking:

|                                                                                            |                                                                                            |
|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Alarm Box:                                                                                 | Float Sensor                                                                               |
| CML16ATEX2356X                                                                             | CML 16ATEX2355X                                                                            |
| IECEX CML 16.0129X                                                                         | IECEX CML 16.0128X                                                                         |
|                                                                                            | CML 16ATEX2356X                                                                            |
|                                                                                            | IECEX CML 16.0129X                                                                         |
|  II 1 G |                                                                                            |
| [Ex ia IIA Ga]                                                                             |  II 1 G |
| -20°C to +40°C                                                                             | Ex ia IIA T3 Ga                                                                            |
|  2503   | -20°C to +40°C                                                                             |

Notified Body: CML Ltd. Unit 1 Newport Business Park,  
New Port Road, Ellesmere Port, CH65 4LZ UK  
Notified Body Number CML 2503

Declaration Number: **EU131/3**

On behalf of the above named company, I declare under our sole responsibility that, on the date the equipment accompanied by this declaration is placed on the market, the equipment conforms with all technical and regulatory requirements of the above listed directives.

*Clive Wellings*

Clive Wellings, Technical Manager

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROTECTED BY COPYRIGHT © AND PROPERTY LAWS AND IS THE SOLE PROPERTY OF HYTEK (GB) LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HYTEK (GB) LTD IS PROHIBITED.