

Tankmaster

Specifications:

Designed to comply with BS799 Pt 2

Application -

For fitting to steel or plastic oil heating storage tanks. (Note a range of adaptors is available for plastic tanks).

For use with oil central heating systems. Eliminates the need for a separate gate valve, level gauge, filter, fire valve and a number of pipe fittings.

Oil Take Off -

Either right hand or left hand.

Gauge Length -

To suit tank depth.

Sight Tube -

Clear P.V.C.

Sight Tube Shield -

Rigid P.V.C.

(Aluminium by request).

Sight Tube Assembly -

Detachable.

Oil Level Valve -

Pull to read (Self Closing).

Fire Valve -

Automatic over temp. shut off.

Oil Line Outlet -

10mm copper compression.

Oil Flow Rate -

Up to 36 litres per hour (8 gallons per hour).

Tank Connection -

½" BSP.

Filter -

Replaceable when boiler is serviced. NOT washable.

Construction:

Body -

Die-cast zinc alloy.

Filter Bowl -

Plated Steel.

Dimensions:

Body Assembly -

15.5cm x 8cm.

Sight Tube Assembly -

As required.

Total Weight (4" 0") -

1.0 kg (approx.).





Four-in-One Level Gauge

- Sight Gauge
- Shut off Valve
- Fire Valve
- Disposable Filter
- Right or Left Hand Compression fitting

All to BS799
OFTEC OFS E103

Filter Bowl Detail

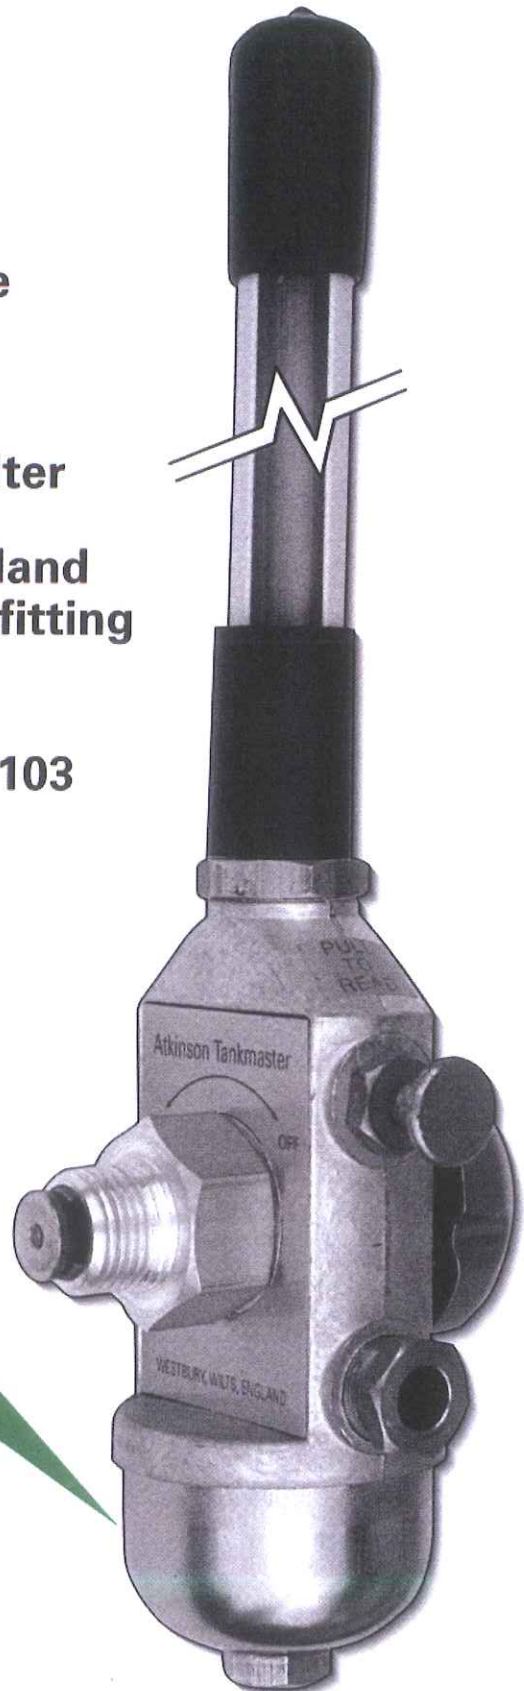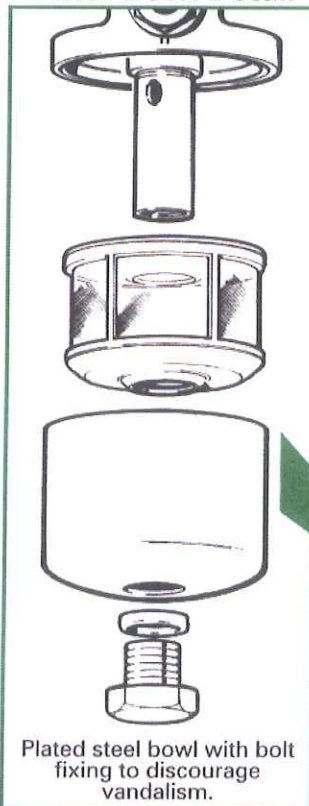

Atkinson Equipment Limited, West Wilts Trading Estate, Westbury, Wiltshire. BA13 4JF.
Telephone: (01373) 822220/823170 Facsimile: (01373) 826996