


FUEL STORAGE TANK RE-CIRCULATION KIT

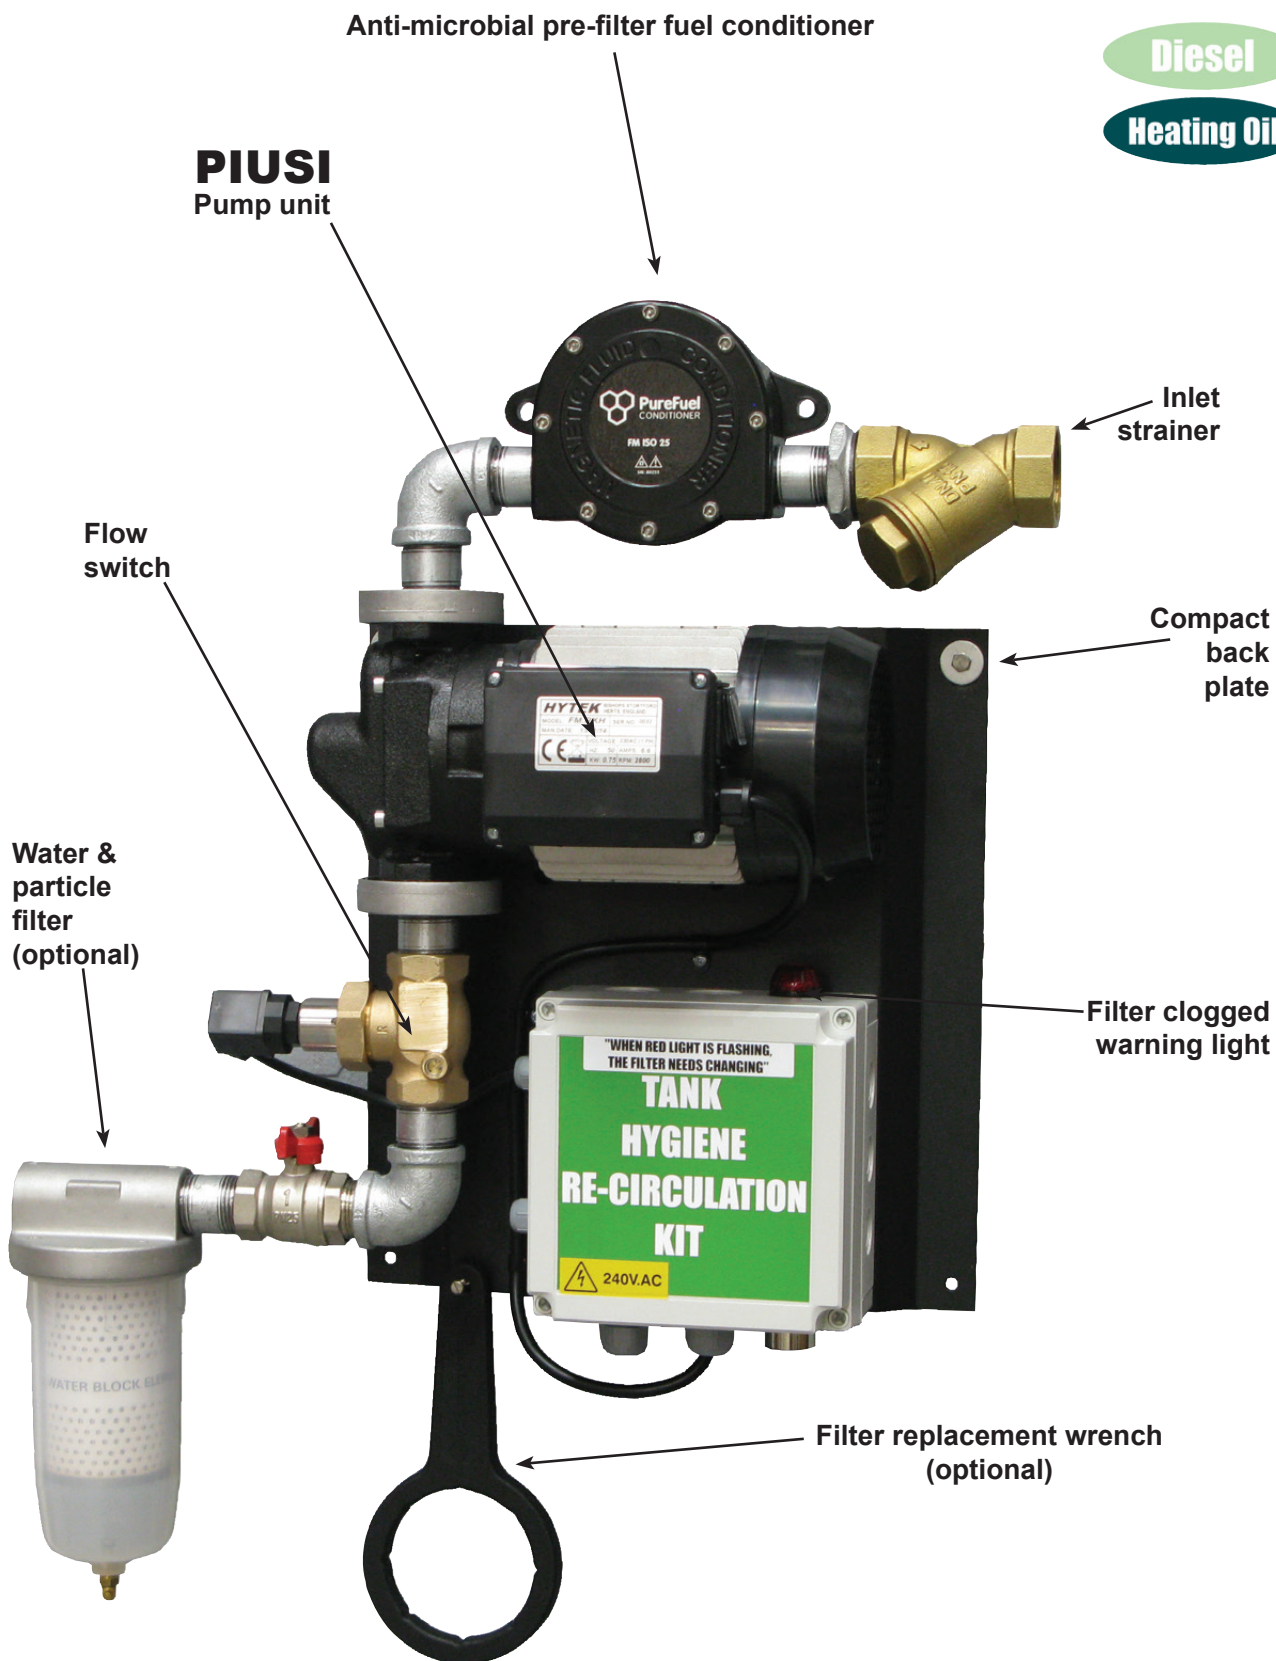

Why Do I Need To Re-Circulate My Fuel?

Microbial contamination (diesel bugs) in fuel storage tanks is becoming a major issue. Often the first signs are when pump or vehicle filters block, in some cases resulting in hefty machinery repair bills.

The latest fuels contain a % of bio fuel (up to 7%) & provide an ideal breeding ground for these bugs. Biofuel acts as a detergent cleaning the inside of the storage tanks allowing dirt to be sucked up by pumps, blocking filters.

Over time these microbes/bugs grow into large colony forming units (CFUs) which get sucked into fuel lines blocking filters.

Storage tanks particularly those with low usage require a permanent system to keep the microbes/bugs dormant by re-circulating fuel to ensure effective microbial treatment.

Kit Specification

- Circulates & prevents degradation of fuel inside storage tanks.
- Fuel passes through a fuel conditioner to prevent microbial growth.
- Fuel is automatically circulated for a preset number of timed periods to ensure the tank contents is re-circulated 1½ times every 28 days.
- When the pump flow rate drops below a preset limit (indicating a clogged filter) the flow switch closes & a warning light flashes (Can also link to a remote warning device).
- For use with diesel.
- Features a 230V pump unit, inlet strainer, fuel conditioner, flow switch, filter clogged warning light, timer & mains junction box. Complete unit is weatherproof.
- Mounted on a wall/tank mounting plate.

Stk Code	Description
FM.RKS	Up to 40,000L tanks (3,000L per day)
FM.RHS	Up to 65,000L tanks (5,000L per day)
Options	
FM.RK.F	Particle/water filter kit – 10 micron (with filter wrench)
RWD2	Remote warning device (links to clogged filter warning light)

Supplied by: