

Pressure Control

Model: Q6 Single Pressure Control
P/N: 9100019


Medium:	Fluorinated Refrigerant, Water, Air & Other Non-Corrosive Media
Pressure Range:	-0.5 to 6 Bar
Differential:	0.6 to 4 Bar
Max Pressure:	16 Bar
Fluid Temperature Range:	-20°C to 120°C
Switch Function:	SPDT Micro-Switch
Electrical Rating:	12A
Fluid Connection:	¼" BSP Male
IP Rating:	IP40
Dimensions:	80 x 62.5 x 45mm
Mounting Bracket:	Supplied As Standard

Model Specification

Model	Range (bar)		Differential (bar)		Factory Setting (bar)		Max. Bellows Press (bar)
	Min	Max	Min	Max	Off	On	
Q6	-0.5	6	0.6	4	3	2	16.5


Contact Function & Pressure Connections

Contact Function




1	Common Terminal
3	Close on, Pressure Decrease
5	Close on, Pressure increase

Pressure Connections

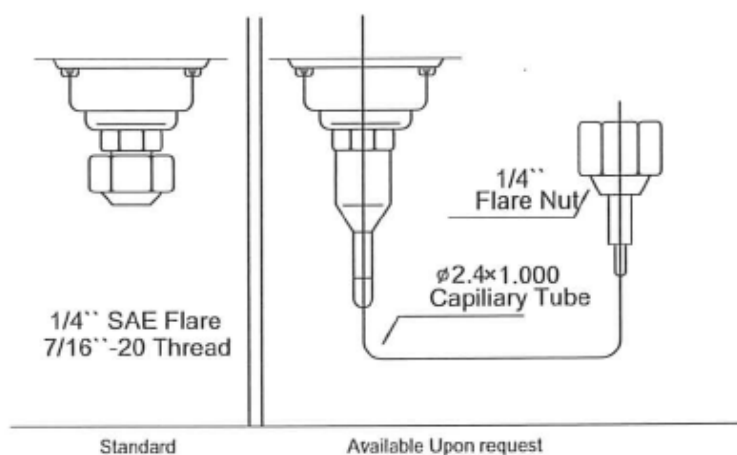

Dimensions

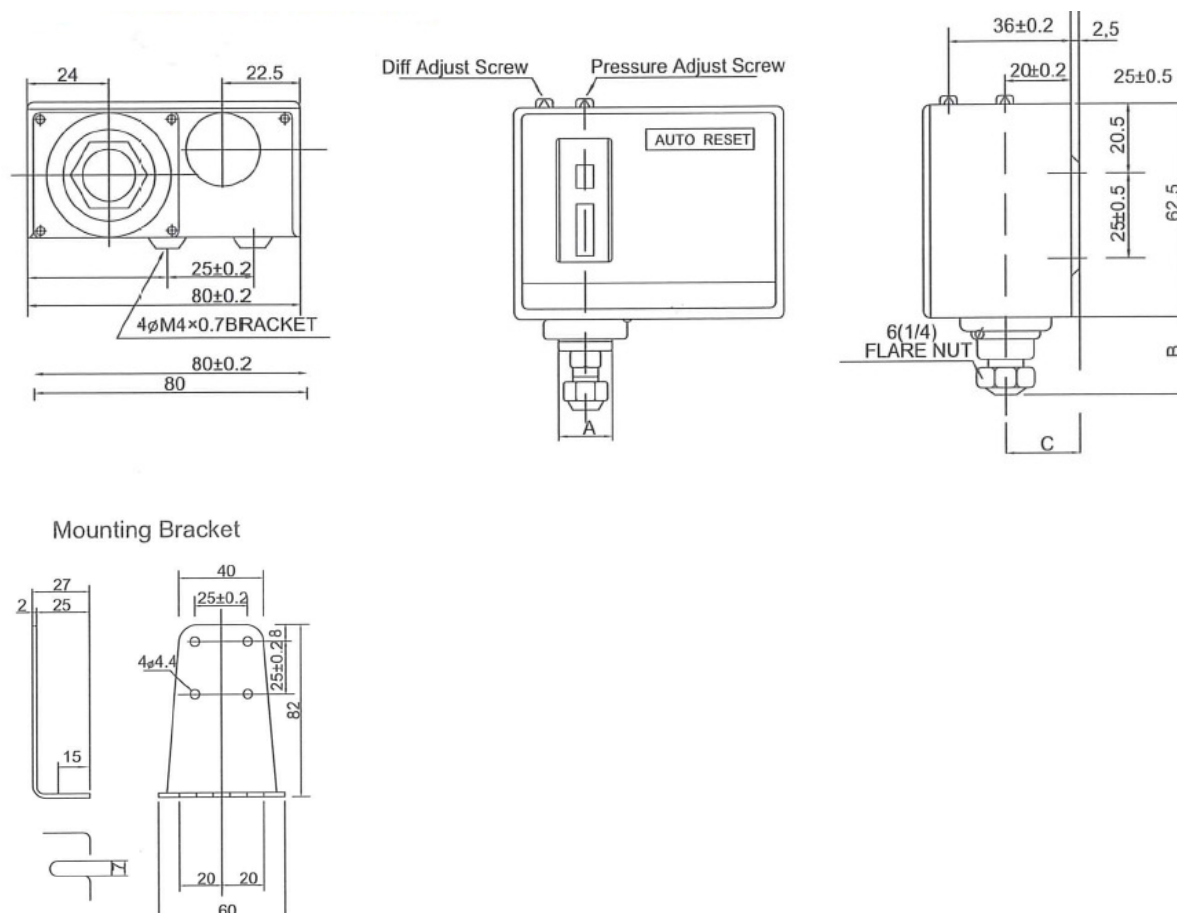

Electrical Rating

Rated Voltage(V)		Power Factor (cos Φ)	125/250V AC
Rated Amps.(A)			
Non -Inductive Current		1	12
Inductive Current	Full Load	0.75	12
	Locked Roter	0.45	72

Whilst every effort has been made to ensure the accuracy of this specification, Anglo Nordic cannot accept any responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement this specification may alter without notice.