




Atomizer 12 W2—"size"—30°

12-E1A1-4G-E
14-02-06

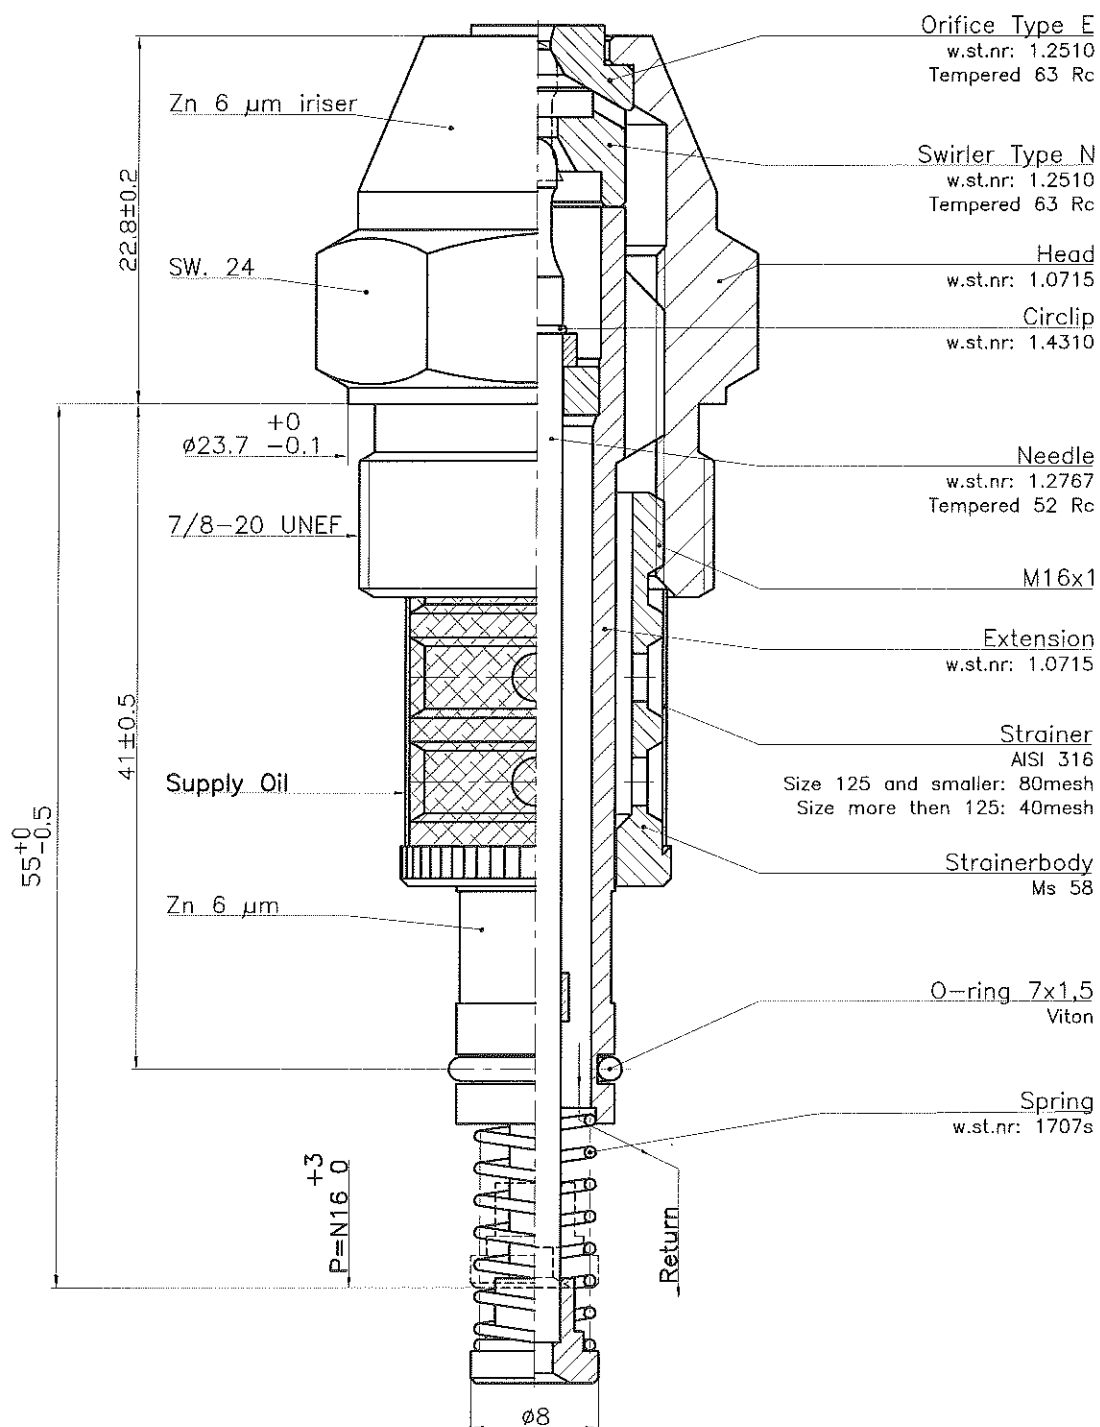


Size [kg/h]
20
25
32
40
50
60
70
80
90
100
115
130
145
160
180
200
225
250
275
300
330
360
400

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

MARKING ON HEXAGON:

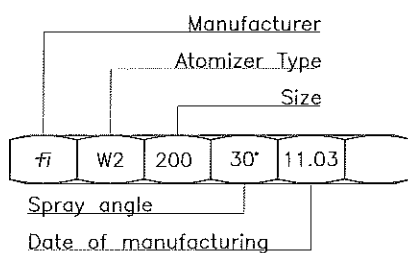

GENERAL DATA:


Test oil viscosity: 5 cSt.
Supply pressure: 25 bar.
Max. output with closed return line.
Turn down 1:4 at 15 bar return pressure,
Max output: up to 80 -2% +8%
up to 180 -2% +5%
over 180 -2% +3%
Spray angle: Max. output 30° +5°
Turned down 55° +8°



Atomizer 12 W2 - "size" - 35°

12-E1BM-4G-E

14-02-06

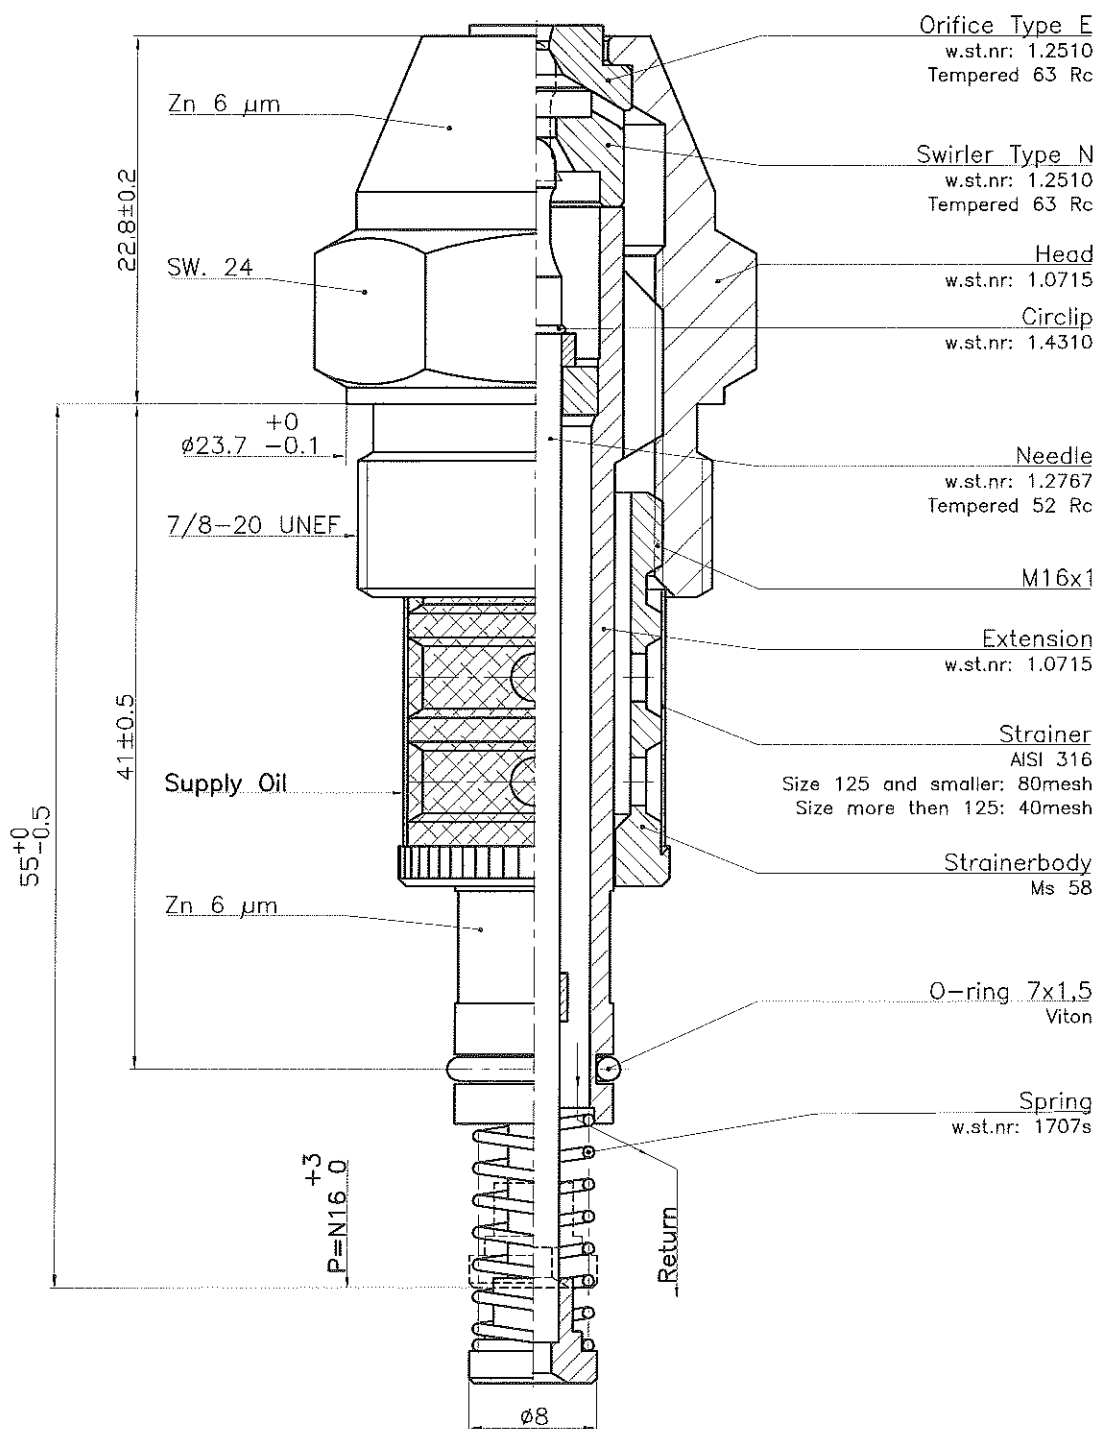


Size [kg/h]
20
25
32
40
50
60
70
80
90
100
115
130
145
160
180
200
225
250
275
300
330
360
400
450
500
550
600

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

MARKING ON HEXAGON:

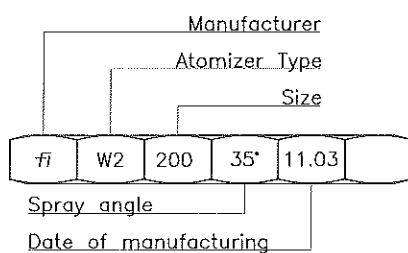

GENERAL DATA:


Test oil viscosity: 5 cSt.
Supply pressure: 25 bar.
Max. output with closed return line.
Turn down 1:4 at 13.5 bar return pressure,
Max output: up to 80 -2% +8%
up to 180 -2% +5%
over 180 -2% +3%
Spray angle: Max. output 35° +5°
Turned down 54° +8°



Atomizer 12 W2—"size"—40°

12-E1DB-4G-E

15-04-10

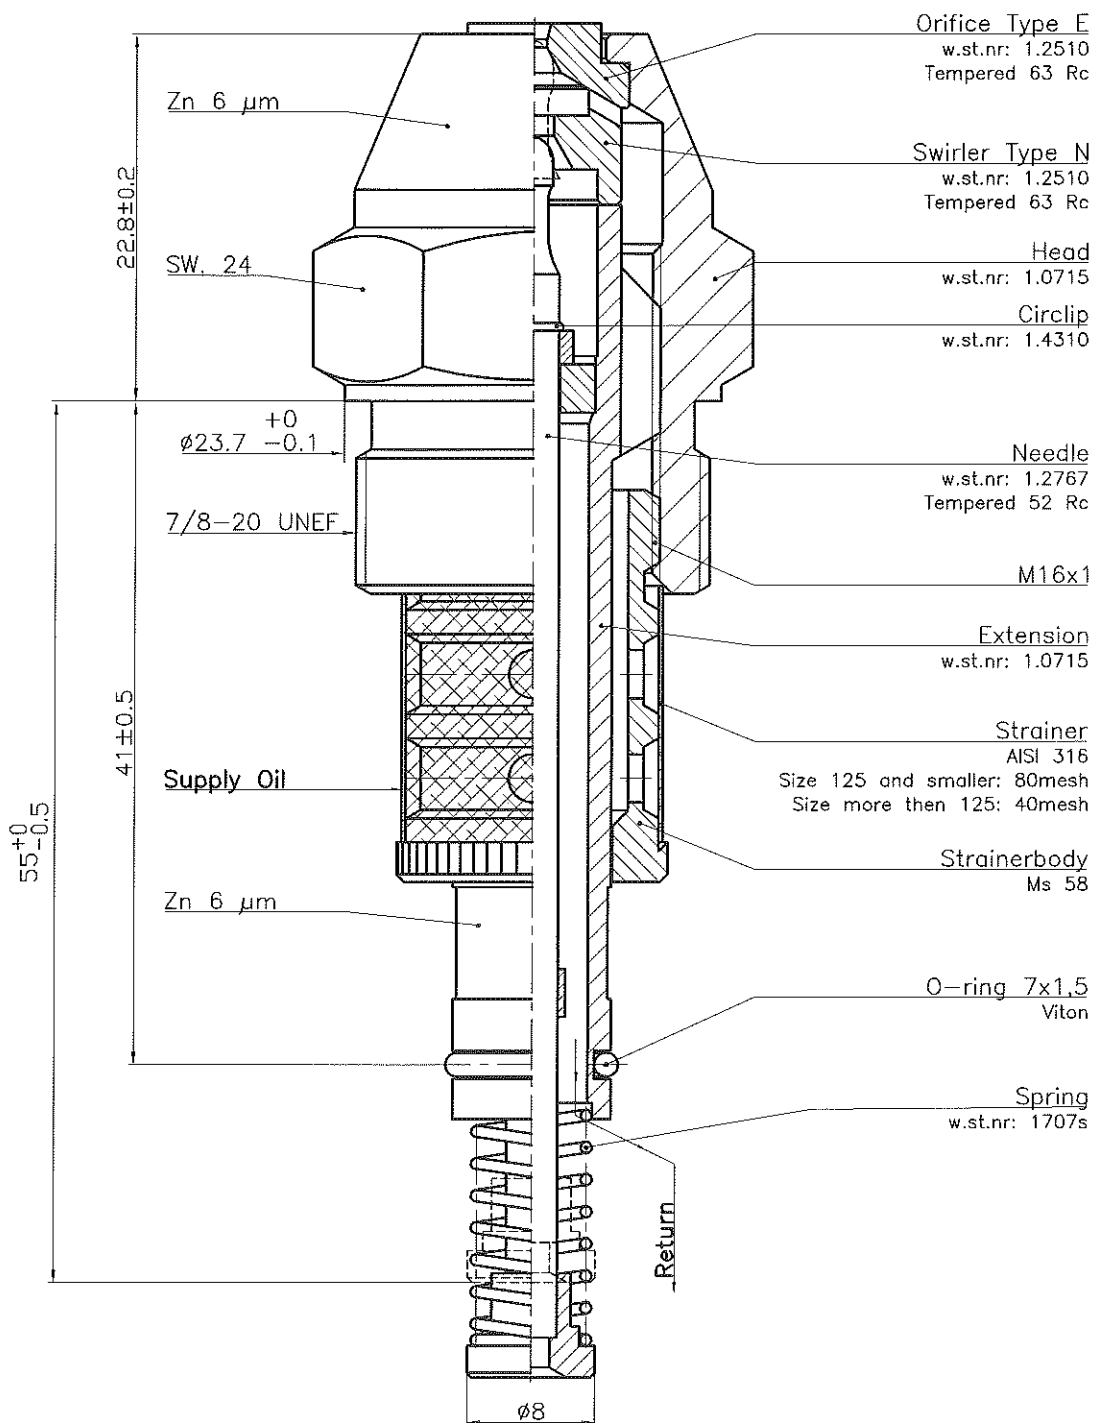


Size [kg/h]
20
25
32
40
50
60
70
80
90
100
115
130
145
160
180
200
225
250
275
300
330
360
400
450
500
550
600

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

MARKING ON HEXAGON:

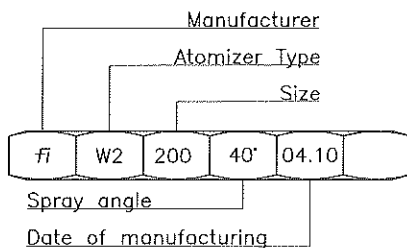

GENERAL DATA:


Test oil viscosity: 5 cSt.
Supply pressure: 25 bar.
Max. output with closed return line.
Turn down 1:4 up to 100 at 10 bar return pressure,
over 100 at 12 bar return pressure.
Max output: up to 80 0% +10%
up to 180 0% +7%
over 180 0% +5%
Spray angle: Max. output 40° +5°
Turned down 53° +7°



Atomizer 12 W2- "size"-45°

12-E1F1-4G-E


14-02-06

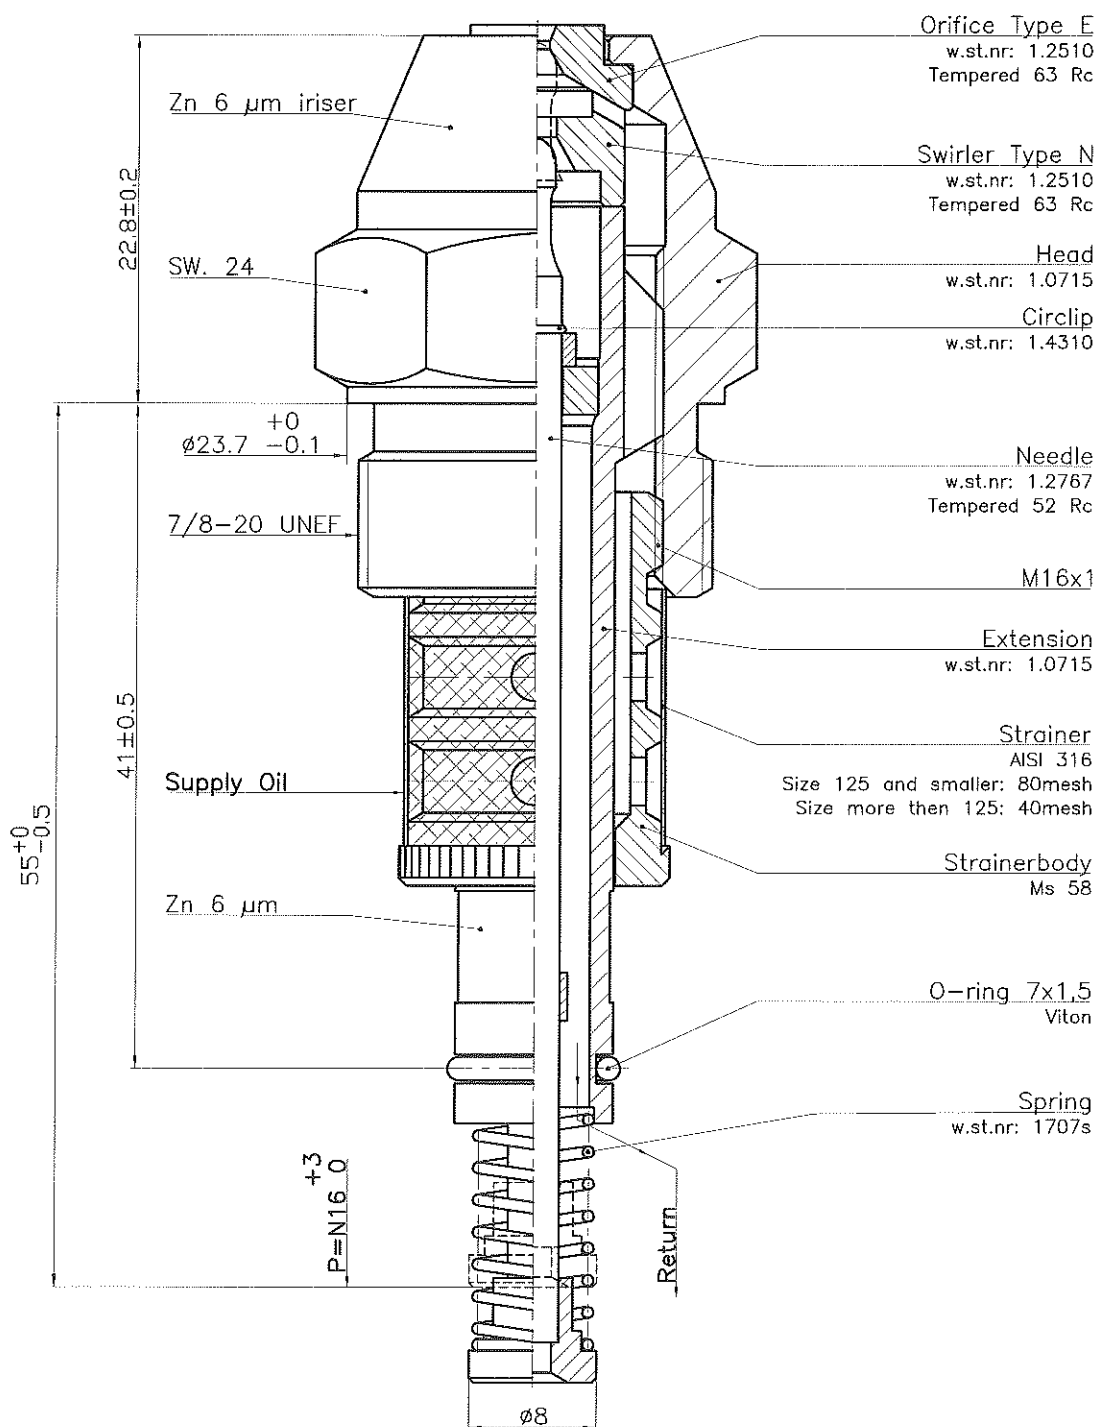

Size	[kg/h]
20	
25	
32	
40	
50	
60	
70	
80	
90	
100	
115	
130	
145	
160	
180	
200	
225	
250	
275	
300	
330	
360	
400	
450	
500	
550	
600	
650	
700	
750	

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

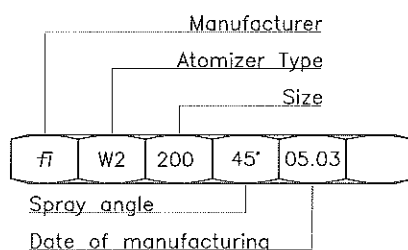MARKING ON HEXAGON:**GENERAL DATA:**


Test oil viscosity: 5 cSt.
Supply pressure: 25 bar.
Max. output with closed return line.
Turn down 1:4 up to 100 at 10 bar return pressure,
over 100 at 8 bar return pressure.
Max output: up to 80 0% +10%
up to 180 0% +7%
over 180 0% +5%
Spray angle: Max. output 45° +5°
Turned down 63° +10°



Atomizer 12 W2-"size"-50°

12-E1GM-4G-E

14-02-06

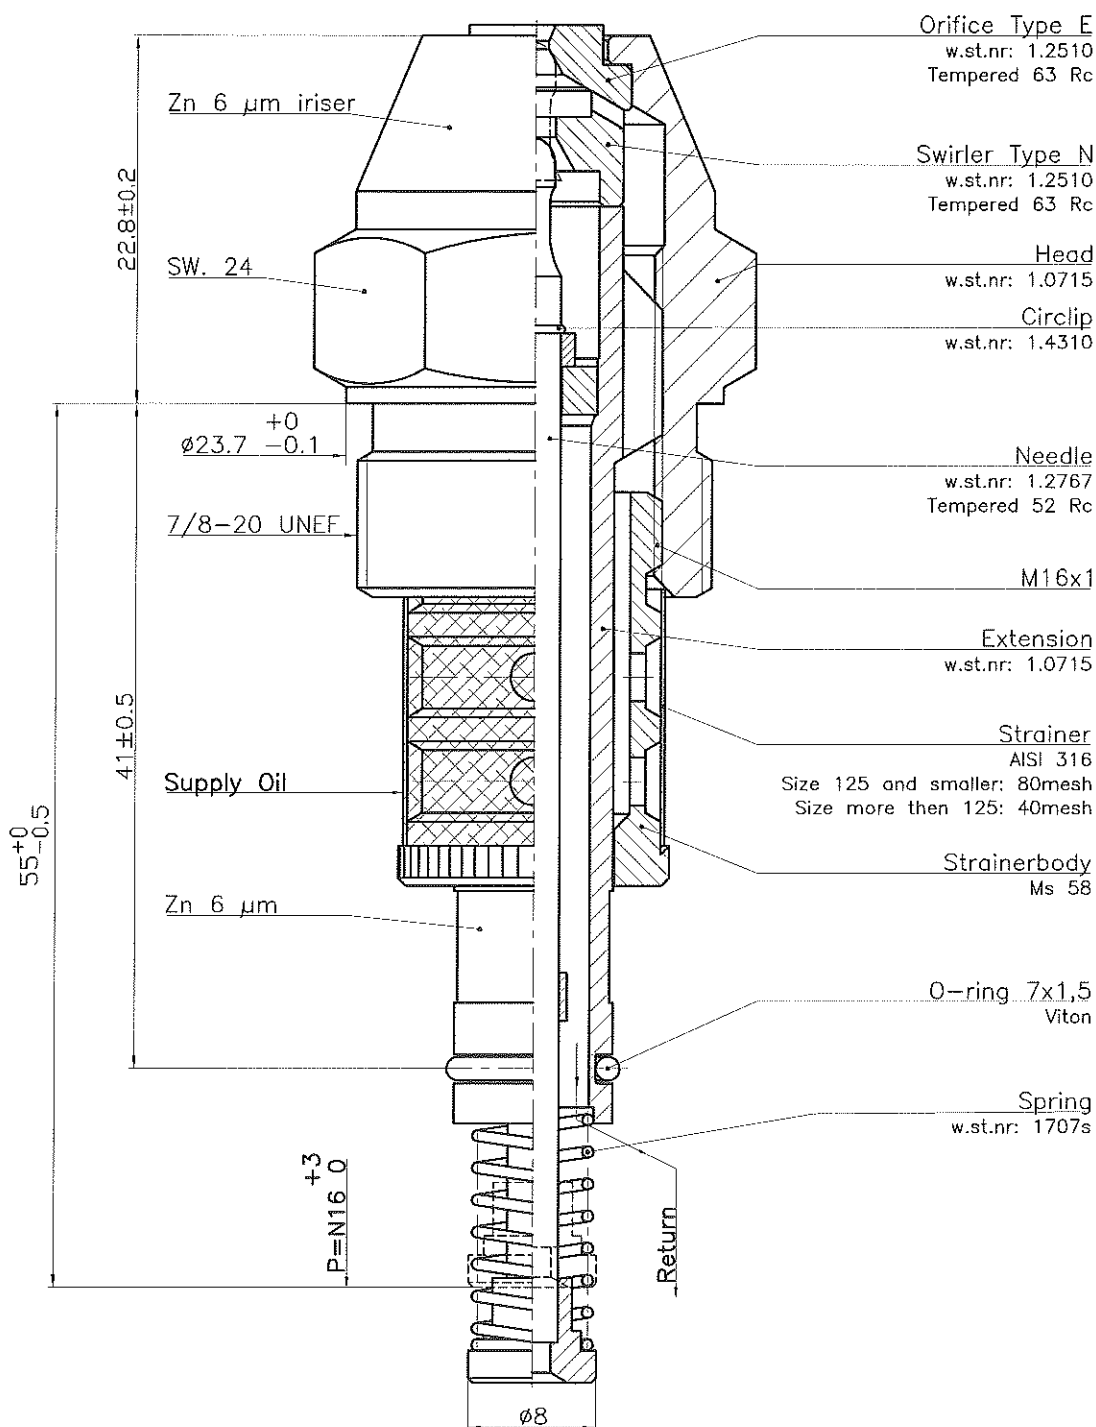


Size	[kg/h]
20	
25	
32	
40	
50	
60	
70	
80	
90	
100	
115	
130	
145	
160	
180	
200	
225	
250	
275	
300	
330	
360	
400	
450	
500	
550	
600	
650	
700	
750	

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

MARKING ON HEXAGON:

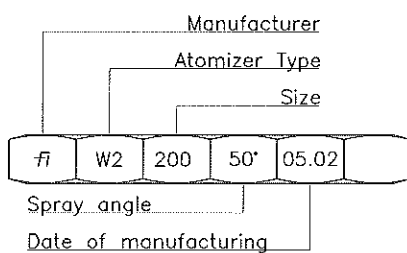

GENERAL DATA:

Test oil viscosity: 5 cSt.

Supply pressure: 25 bar.

Max. output with closed return line.


Turn down 1:4 up to 100 at 10 bar return pressure,
over 100 at 8 bar return pressure.Max output: up to 80 0% +10%
up to 180 0% +7%
over 180 0% +5%Spray angle: Max. output 50° +5°
Turned down 68° +10°



Atomizer 12 W2 - "size" - 60°

12-E1L1-4G-E

14-02-06

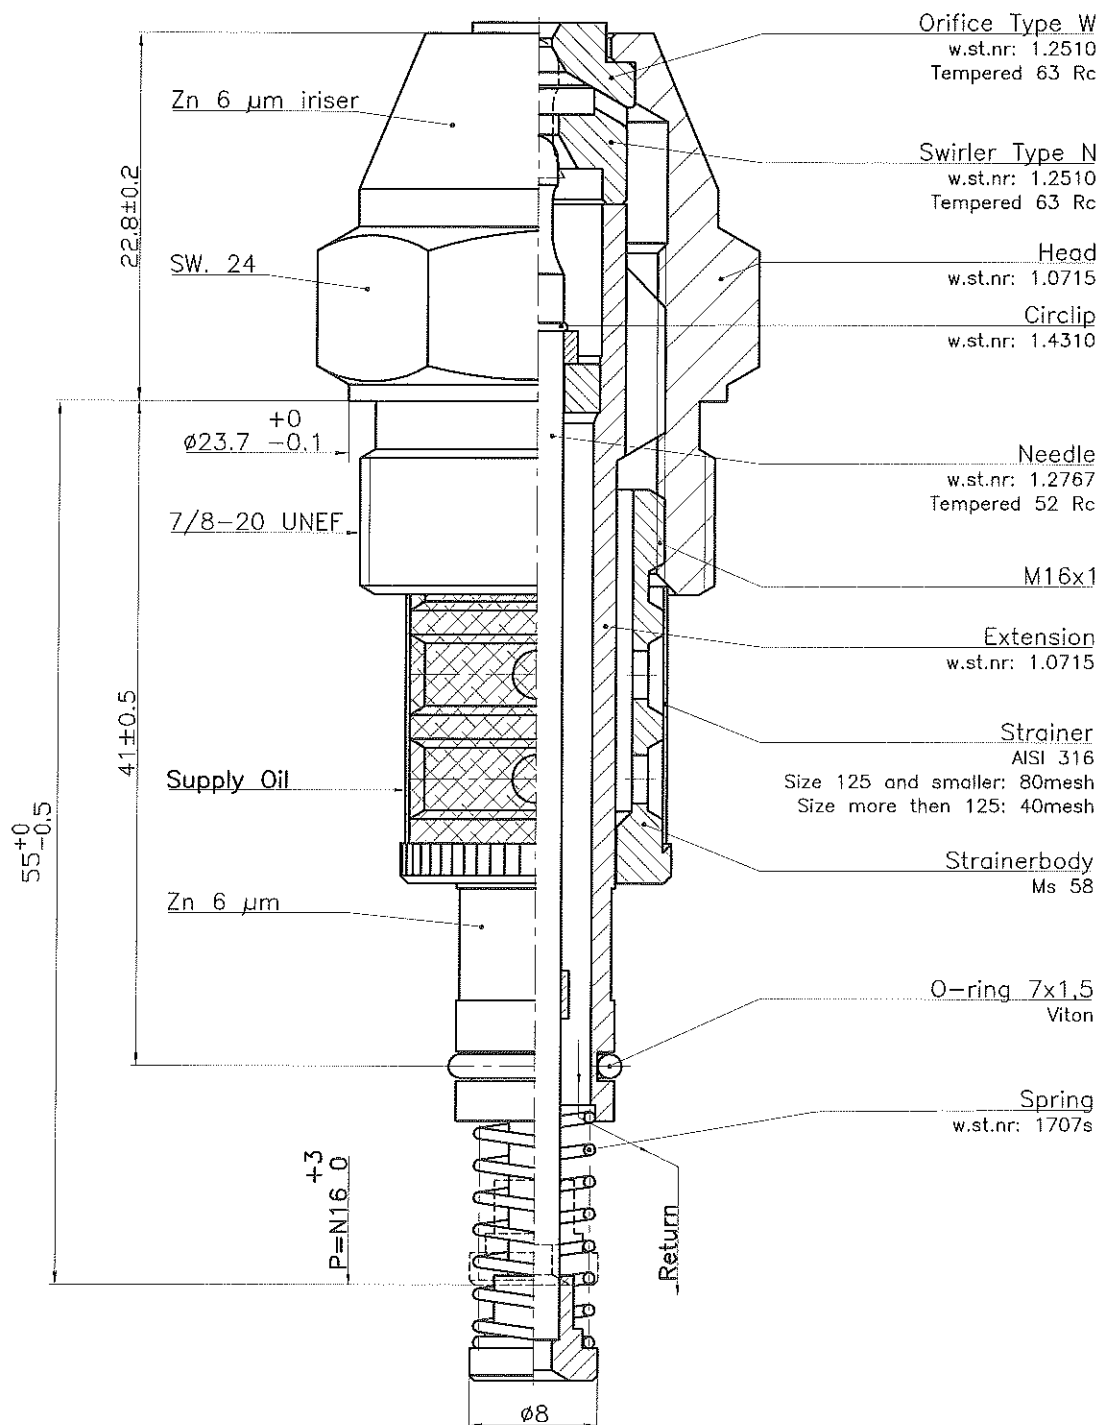


Size [kg/h]
20
25
32
40
50
60
70
80
90
100
115
130
145
160
180
200
225
250
275
300
330
360
400
450
500
550
600
650
700
750

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

MARKING ON HEXAGON:

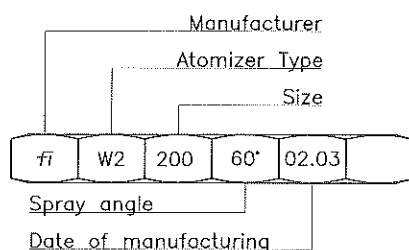

GENERAL DATA:

Test oil viscosity: 5 cSt.
Supply pressure: 25 bar.
Max. output with closed return line.
Turn down 1:4 up to 100 at 10 bar return pressure,
over 100 at 8 bar return pressure.
Max output: up to 80 0% +10%
up to 180 0% +7%
over 180 0% +5%
Spray angle: Max. output 60° +5°
Turned down 78° +10°